bouncepadi

Core Floorstanding

Assembly Instructions

Tools Required:

- Socket Driver
- 10mm Spanner *or adjustable spanner

Sheet Code: BP-IM-092_REV0 Release Date: 15/08/2024 Copyright 2024 Spotspot Ltd. (T/A Bouncepad) all rights reserved. Confidential, no part of this publication


copyright holder.

Rubber Collar Floorstanding Base Floorstanding Cover may be reproduced or transmitted in any form without the written permission of the

Tablet Mounting

Fixings Kit Floorstanding

Floorstanding







Fixings List re of our product range you may receive additional fixings in the fixings kit




In the Box




Orientate, locate & secure the Floorstanding Pole to the Floorstanding Base as shown. Ensure that all fixings are installed correctly.





Locate the Floorstanding Cover over the Floorstanding Pole.




Locate & attach the Shell to the Floorstanding in the correct orientation.







Attach the Flat Cable 5 to the Tablet with the U-Bend Head.




Secure the Flat Cable to the Mounting Plate 6 with the Cable Clamp as





Remove the Mounting Plate adhesive backing. Attach level & centrally to the Tablet back as shown.

3

shown.

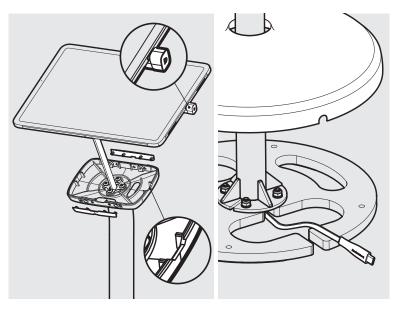







Remove the Fixing Covers. Feed the Flat Cable into the assembly & locate the Tablet in the chosen orientation.

Secure the Tablet to the Shell & attach the Fixing Covers as shown.


9.1 Connect the tablet power cable to its mains power source.




9.2 If installing a battery pack, connect the Tablet Cable and locate the pack into the Floorstanding Base.



With the Floorstanding Cover on the ground, locate & fit the Floorstanding Rubber Collar.



Use a Kensington® Microsaver product to tether to a secure object. (refer to your Kensington® instructions for full details)



Installation is now complete.